

Vehicle Display Controller

- 3 standard versions available:
 - Optical rotary encoder plus 5 hot keys
 - with or without an 8-way joystick and center pushbutton
- Custom legends & form factors available
- SAE-J1939 compliant
- Sealed to IP67
- Vibration and impact resistant
- Operating Temp: -40°C to +85°C
- Long Life: >500,000 cycles each position
- Support for multiple key combinations
- Dimmable LED backlit legends
- Input voltage: 8VDC to 32VDC

Put display functions within reach.


- 5 hot keys for rapid navigation
- Scroll with rotary encoder
- Select with pushbutton
- Navigate with joystick



Rotary and Joystick Knob

Rotary Knob only

DIMENSIONS in inches (and millimeters)

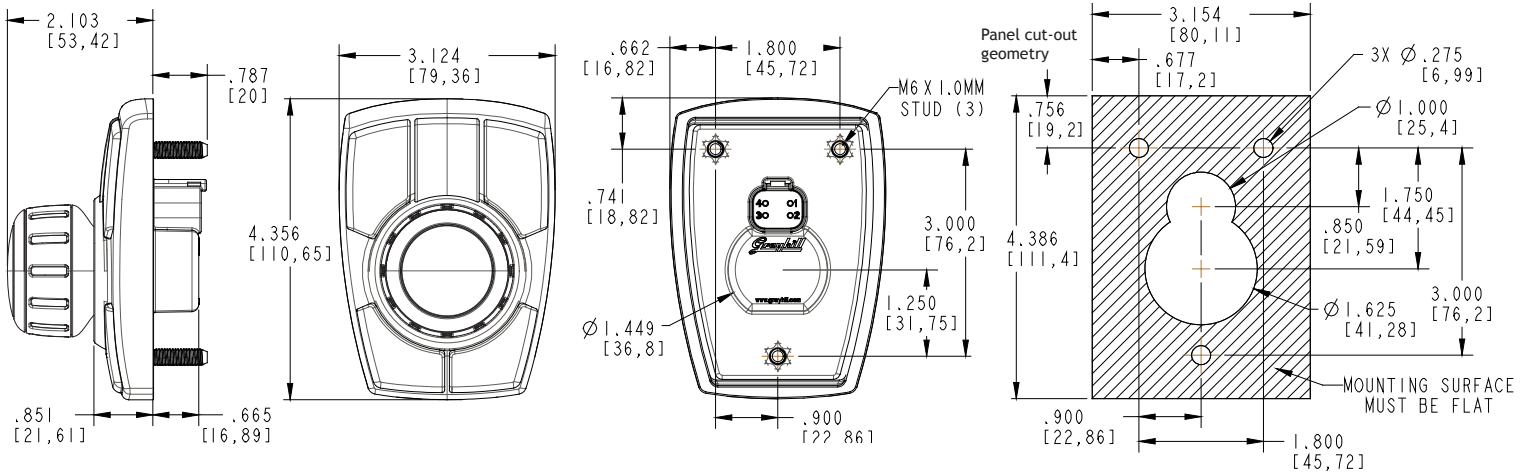

Your Experts in Cab Controls

Grayhill specializes in the design, development and production of human interface controls, including:

- Cab user interface design
- Customized control panels
- CAN-bus interface devices

Agriculture



Construction





YOUR PRODUCT DEVELOPMENT PARTNER

ENVIRONMENTAL SPECIFICATIONS

Operating temperature	ANSI/ASEA EP455 5.1.1 Level 2	-40°C for 4 hours to +85°C for 11 hours
Storage Temperature	ANSI/ASEA EP455 5.1.2 Level 2	-40°C 4 hours to +85°C 4 hours
Thermal Shock	ANSI/ASEA EP455 5.1.3	-40°C to 70°C at a rate of 4°C/min (1 hour at extremes)
Altitude (Barometric Pressure)	ANSI/ASEA EP455 5.2	101.3kPa to 18.6kPa
Sand and Dust	ANSI/ASEA EP455 5.3	24 hours with 0.88g/m3
Solar Radiation	ANSI/ASEA EP455 5.4	43 to 75W/m2 UV Radiation (280 to 400nm wavelength) for 300h
Wash Down	ANSI/ASEA EP455 5.6 Level 2	375 kPa and 8.3 L/min for 10 minutes @ 15°C Water temp
Ingress Protection	IP67	1 meter submersion for 30 minutes
Humidity	ANSI/ASEA EP455 5.13	96% Humidity at 35°C for 240 hours.
Salt Fog	ANSI/ASEA EP455 5.9	5% aqueous solution of NaCl @ 35°C and a pH between 6.5 and 7.2 for 48 hours
Chemical resistance (Resistance to Solvents)	ISO 16750-5 EP 455 (5.8.2)	
Thermal Cycling (Change of Temperature)	ISO 16750-4	-40° to 85°C 2 hours at extremes change rate = 1°C/min (8 hours) repeat for 30 cycles.

ELECTROMAGNETIC COMPATIBILITY SPECIFICATIONS

ESD	ANSI/ASEA EP455 5.12	+/- 25kV for 10 pulses, 5 of each polarity
Radiated Immunity	ISO14982 6.6	10MHz-1000MHz Range 48mA Bulk Current Injection 100V/m
Conducted Emissions	SAE J1113-41, CISPR25	Class 3
Broadband Radiated Emissions	ISO14982 6.4	64dB to 54dB, 30MHz-75MHz (linearly decreases) 54dB to 65dB, 75MHz-400MHz (linearly increases) 65dB, 400MHz-1000MHz

CE COMPLIANCE

Agriculture and Forestry Machinery EMC	ISO 14982	ESA
Construction Machinery EMC	EN 13309:2000	ESA

CONNECTION

4 pin Deutsch DT Connector. Power with 8V to 32V vehicle type inputs.



Pin	1	2	3	4
Signal	Power	Gnd	CAN_H	CAN_L

MECHANICAL PERFORMANCE

Vibration, Random	ANSI/ASEA EP455 5.15.1	2 hours each axis @ 52.4 m/s2 RMS overall acceleration and spectral power density of 2m2/s3 from 50Hz to 2000Hz
Vibration, Sinusoidal	ANSI/ASEA EP455 5.15.2	A logarithmic sweep from 10Hz to 2000Hz to 10Hz over a period of 20 minutes for 4 hours in each of 3 orthogonal axes with amplitude of 1.5mm from 10Hz to 40Hz and a constant acceleration of 35m/s2 RMS from 40Hz to 2000Hz.
Shock / Crash Safety	ANSI/ASEA EP455 5.14	A single 11ms half sine pulse of 490 m/s2 in 3 perpendicular axes.
Drop	ANSI/ASEA EP455 5.14.2 Level 1	Drop component 400 mm onto a hardwood benchtop on all practical edges.
Shipping integrity	International Safe Transit Agency procedure 3A	

ELECTRICAL PERFORMANCE SPECIFICATIONS

Maximum load	ANSI/ASEA EP455 5.1.1 Level 2	-40°C 4 hours +85°C for 11 hours max load applied
Jump start forward voltage	ISO 16750-2	36V for 60 minutes
Jump start reverse voltage	ISO 16750-2	-36V for 60 minutes
Short circuit protection	ISO 16750-2	All outputs to ground for 60s
Reverse polarity protection	ISO 16750-2	28V for 60s
Starting profile	ISO 16750-2	Class A
Battery-less operation	ANSI/ASEA EP455 5.11.3 Level 2	Apply 6+12.6sin(2*pi*f*t) f is swept from 500Hz to 1.5kHz 5min
Load dump	ISO 7637-2 Test Pulse 5b	Class A
Switching spikes – negative	ISO 7637-2 Test Pulse 3a	Class A
Switching spikes – positive	ISO 7637-2 Test Pulse 3b	Class A
Wire harness inductance	ISO 7637-2 Test Pulse 2a and 2b	Class A
+/- inductive load pulse	ANSI/ASEA EP455 5.11.4	14-300e^(-t/.001)V 1Hz for 300 cycles
+/- mutual coupling	ANSI/ASEA EP455 5.11.6 Level 2	14+200e^(-t/14x10^-6)V 1Hz for 300 cycles
Alternator field decay	ANSI/ASEA EP455 5.11.2	Class A

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	KEY LEGENDS
3J0005-100	Rotary Selection	
3J0015-100	Rotary w/ Pushbutton	Blank
3J0115-100	Rotary w/ Push & Joystick	
3J1005-100	Rotary Selection	
3J1015-100	Rotary w/ Pushbutton	ISO Symbols
3J1115-100	Rotary w/ Push & Joystick	
3J2005-100	Rotary Selection	
3J2015-100	Rotary w/ Pushbutton	Targets
3J2115-100	Rotary w/ Push & Joystick	

Grayhill, Inc.

561 Hillgrove Avenue
LaGrange, Illinois 60525

Bulletin 1124

www.grayhill.com/Distributor CHINA www.hmcs.cn

Custom options available

Contact Grayhill distributor
in CHINA, Tel: (010)6851-9097